
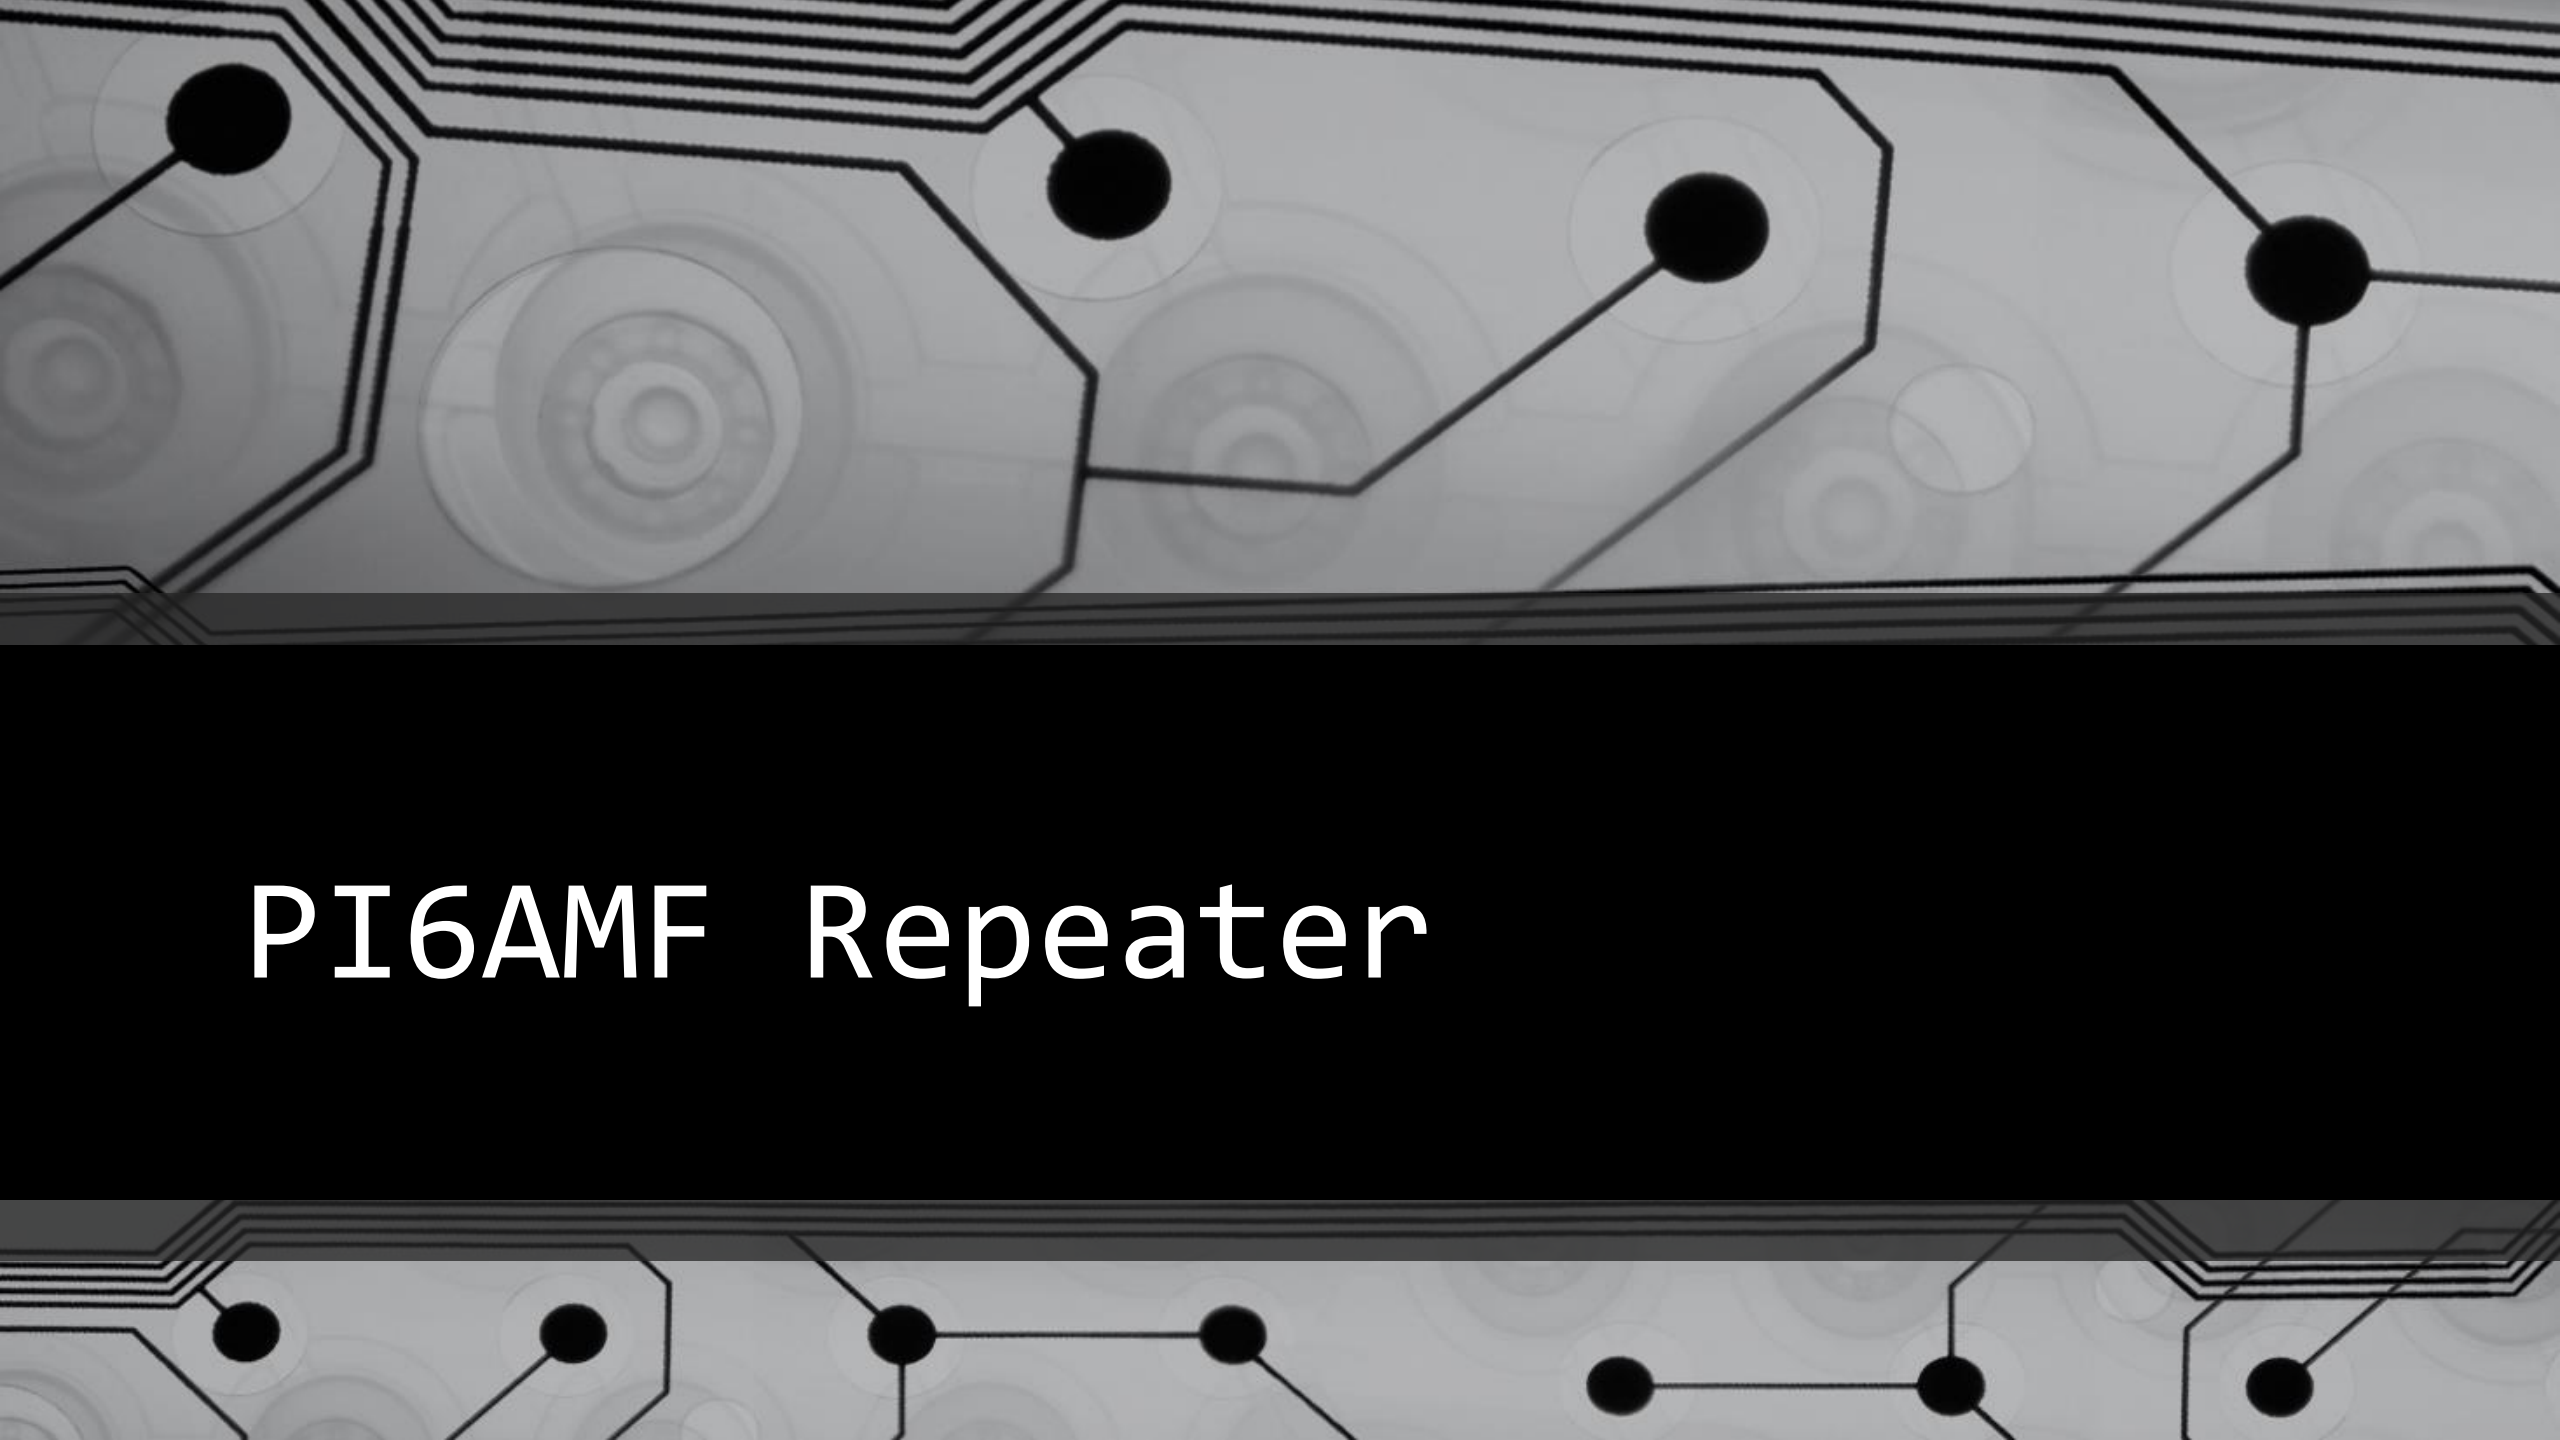



The image features a background of a circuit board with various traces and circular components. A solid black horizontal band runs across the middle of the image, serving as a backdrop for the text.


PI6AMF Repeater

Schematische opzet PI6AMF

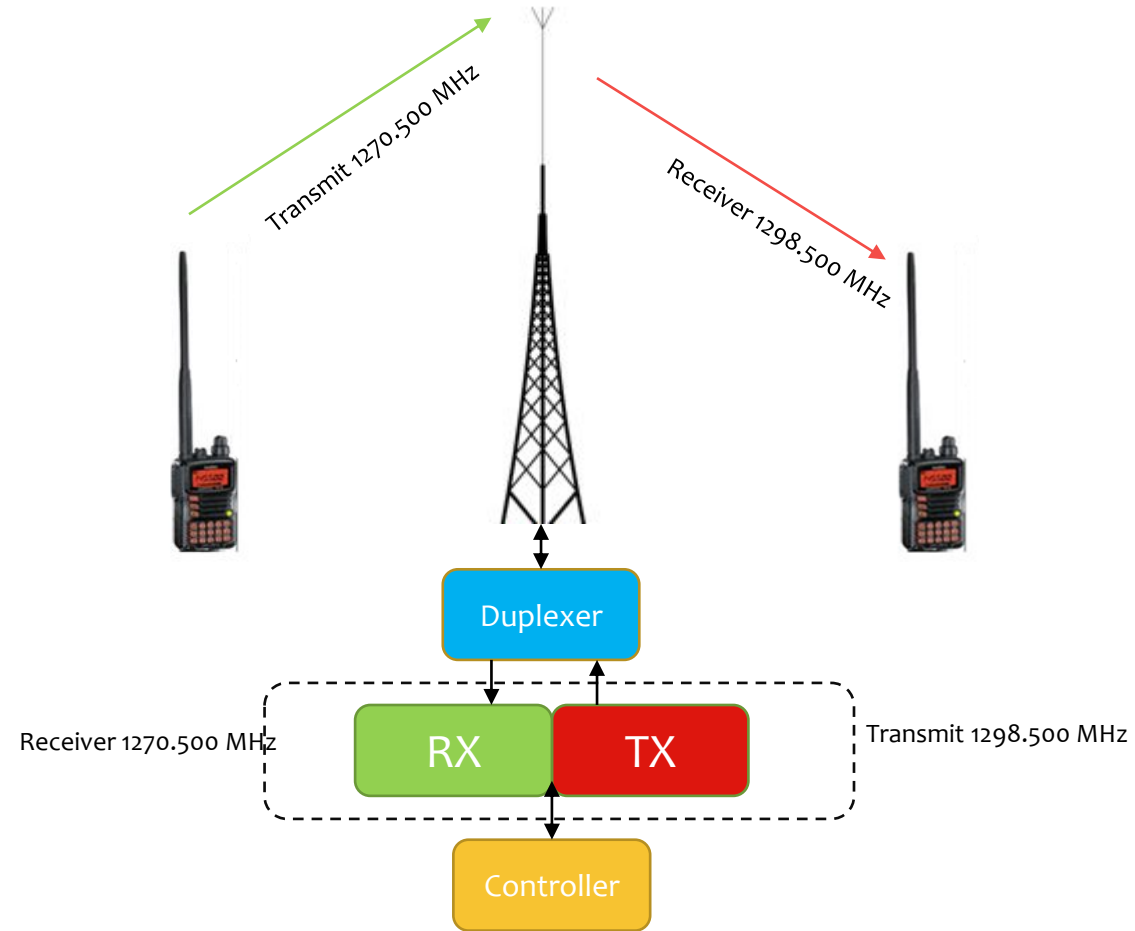

Overview PI6AMF

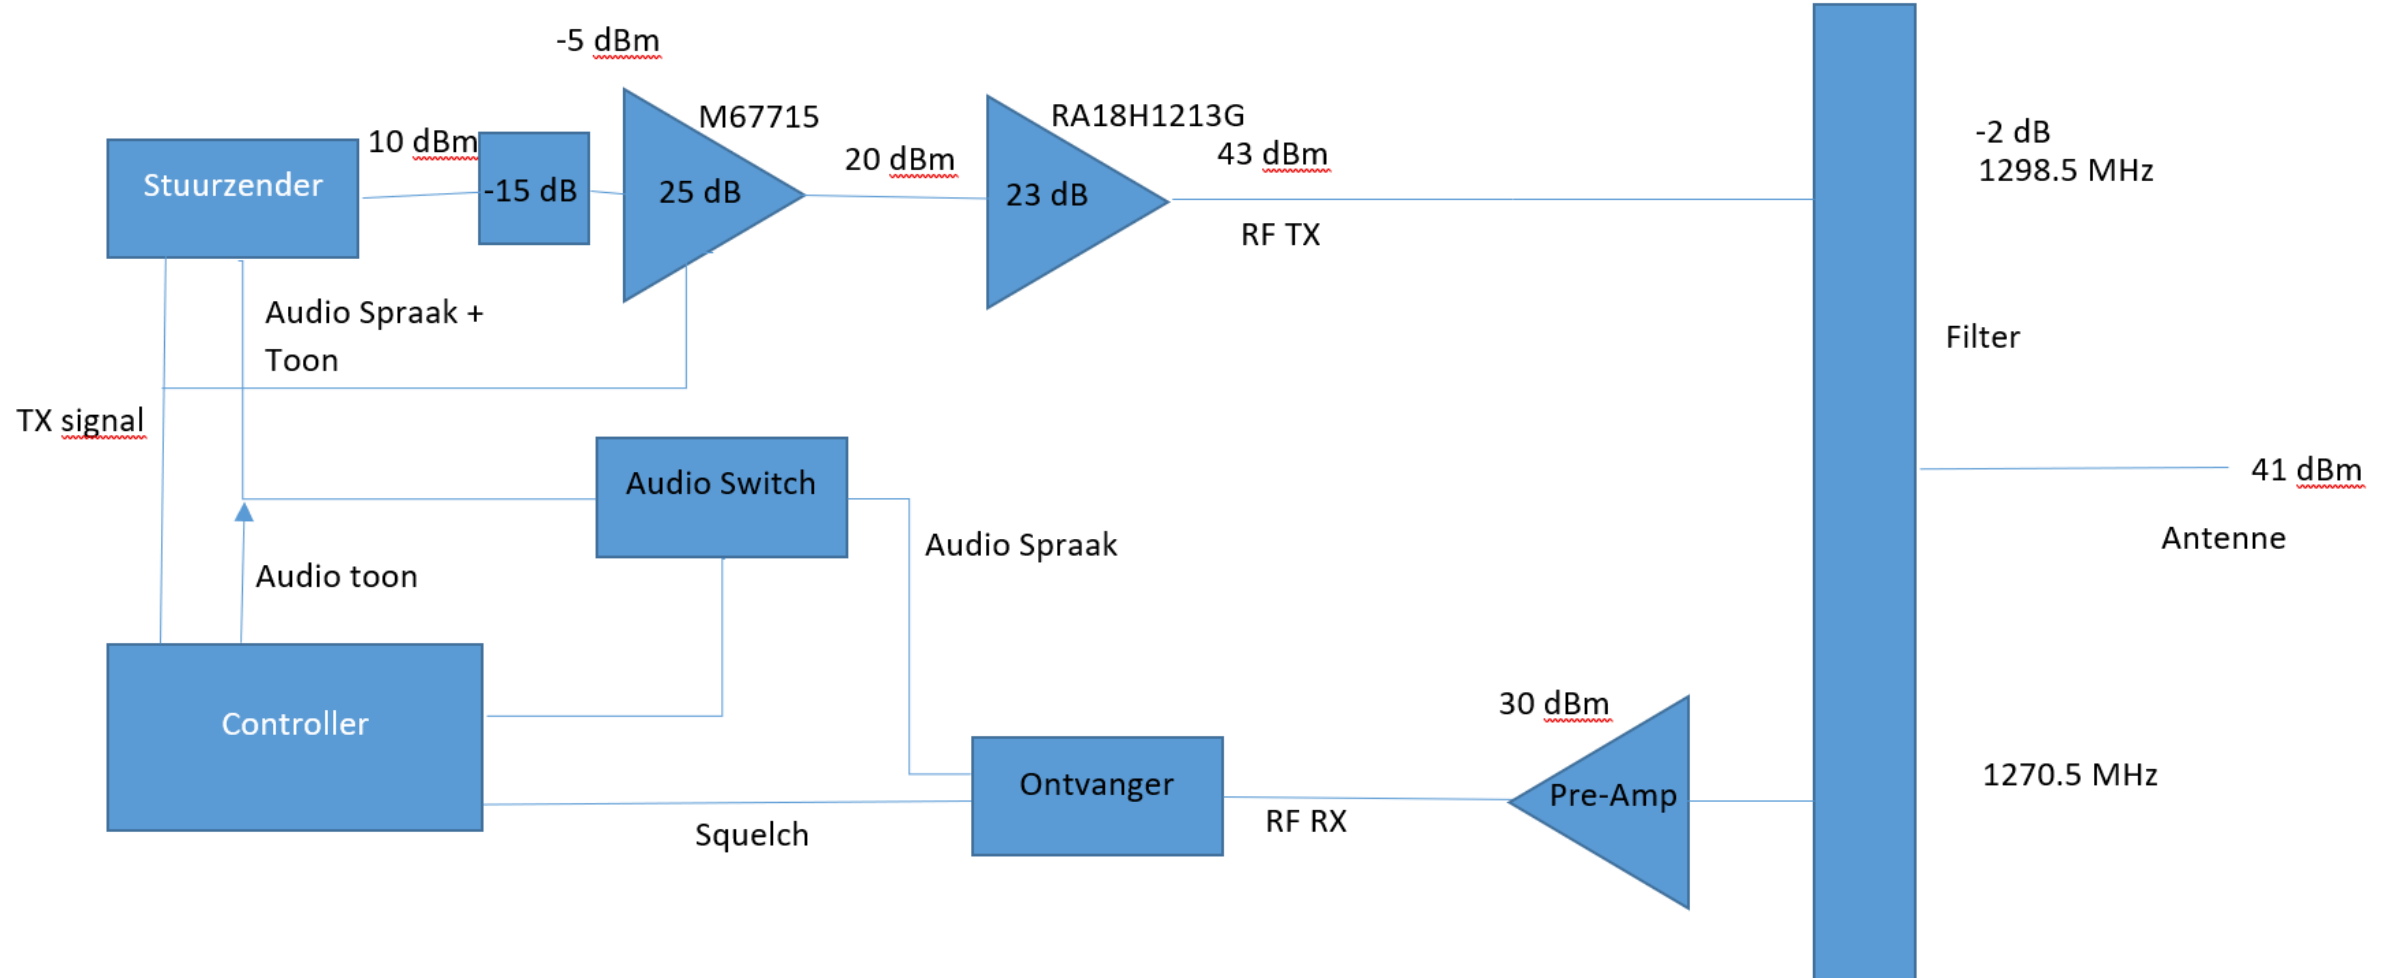


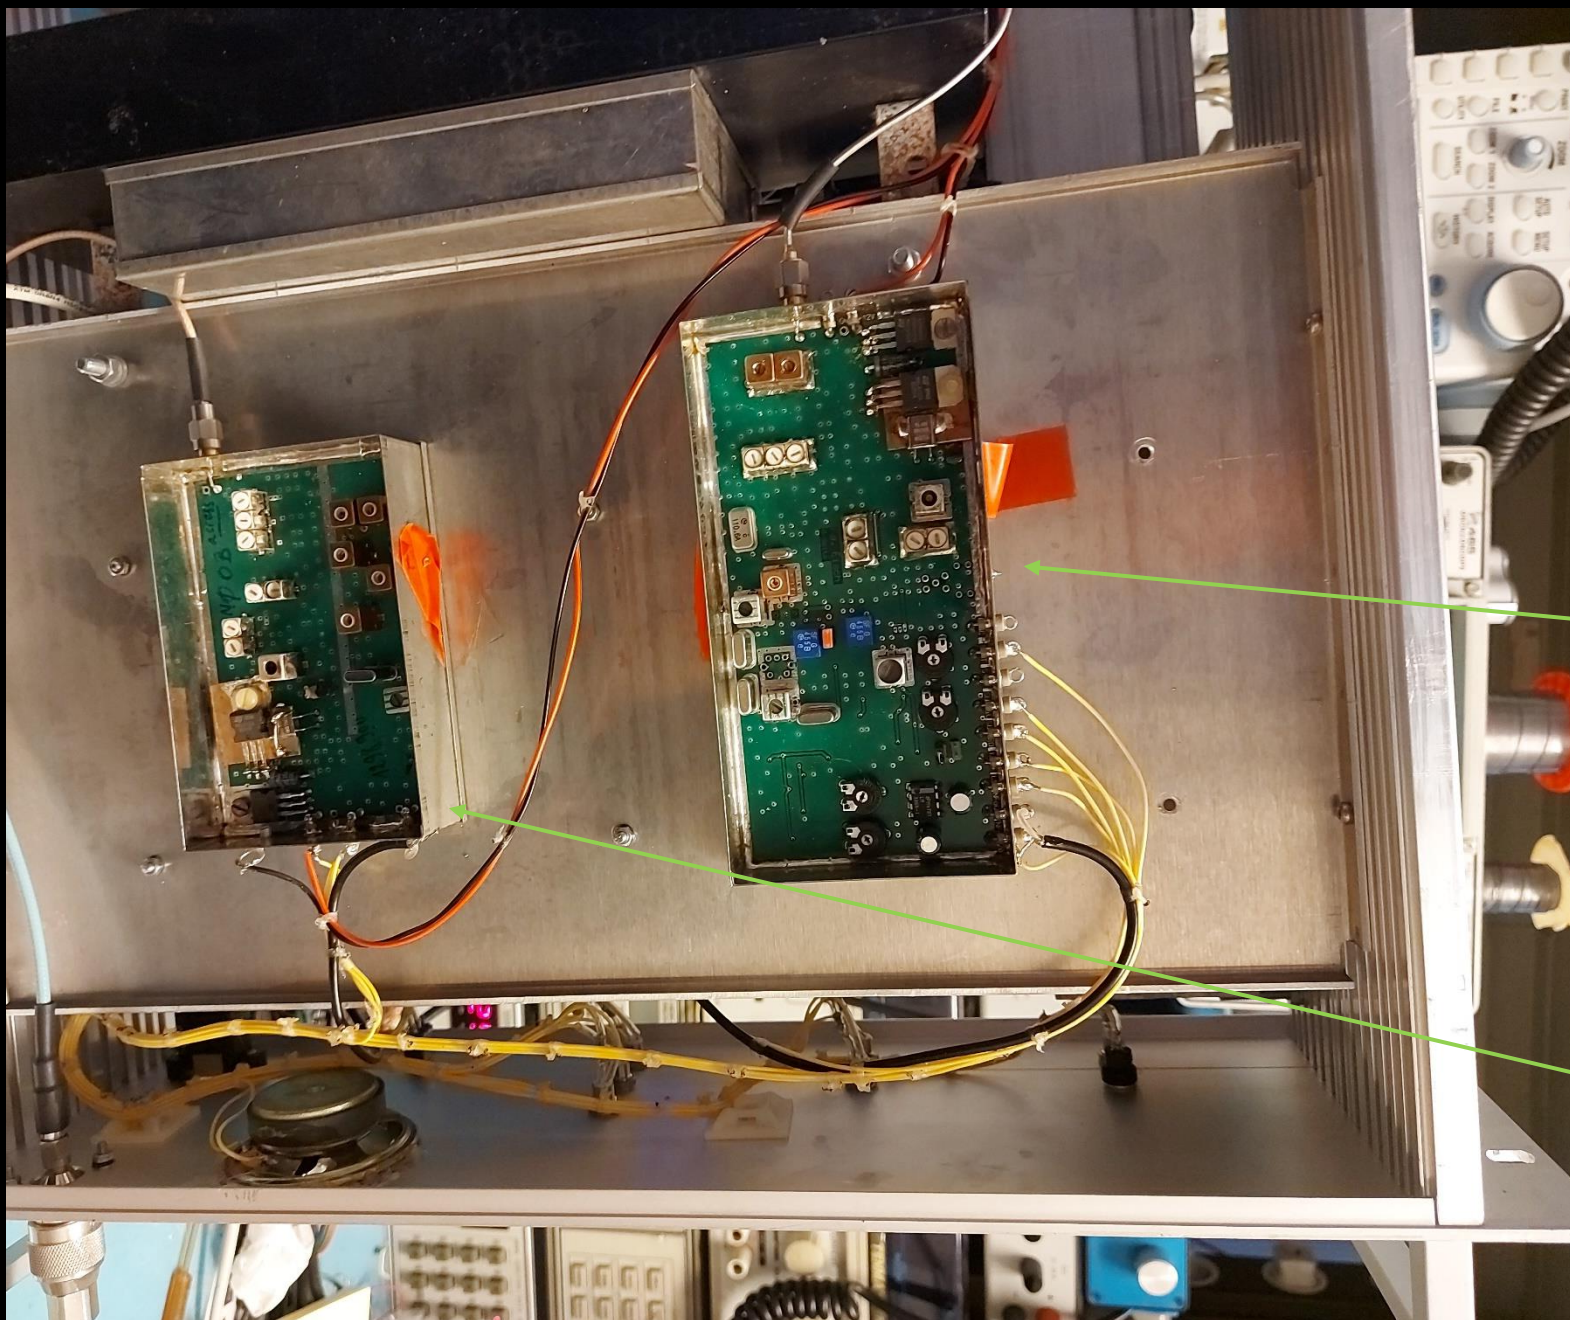

PI6AMF

Ontvanger

Stuur Zender

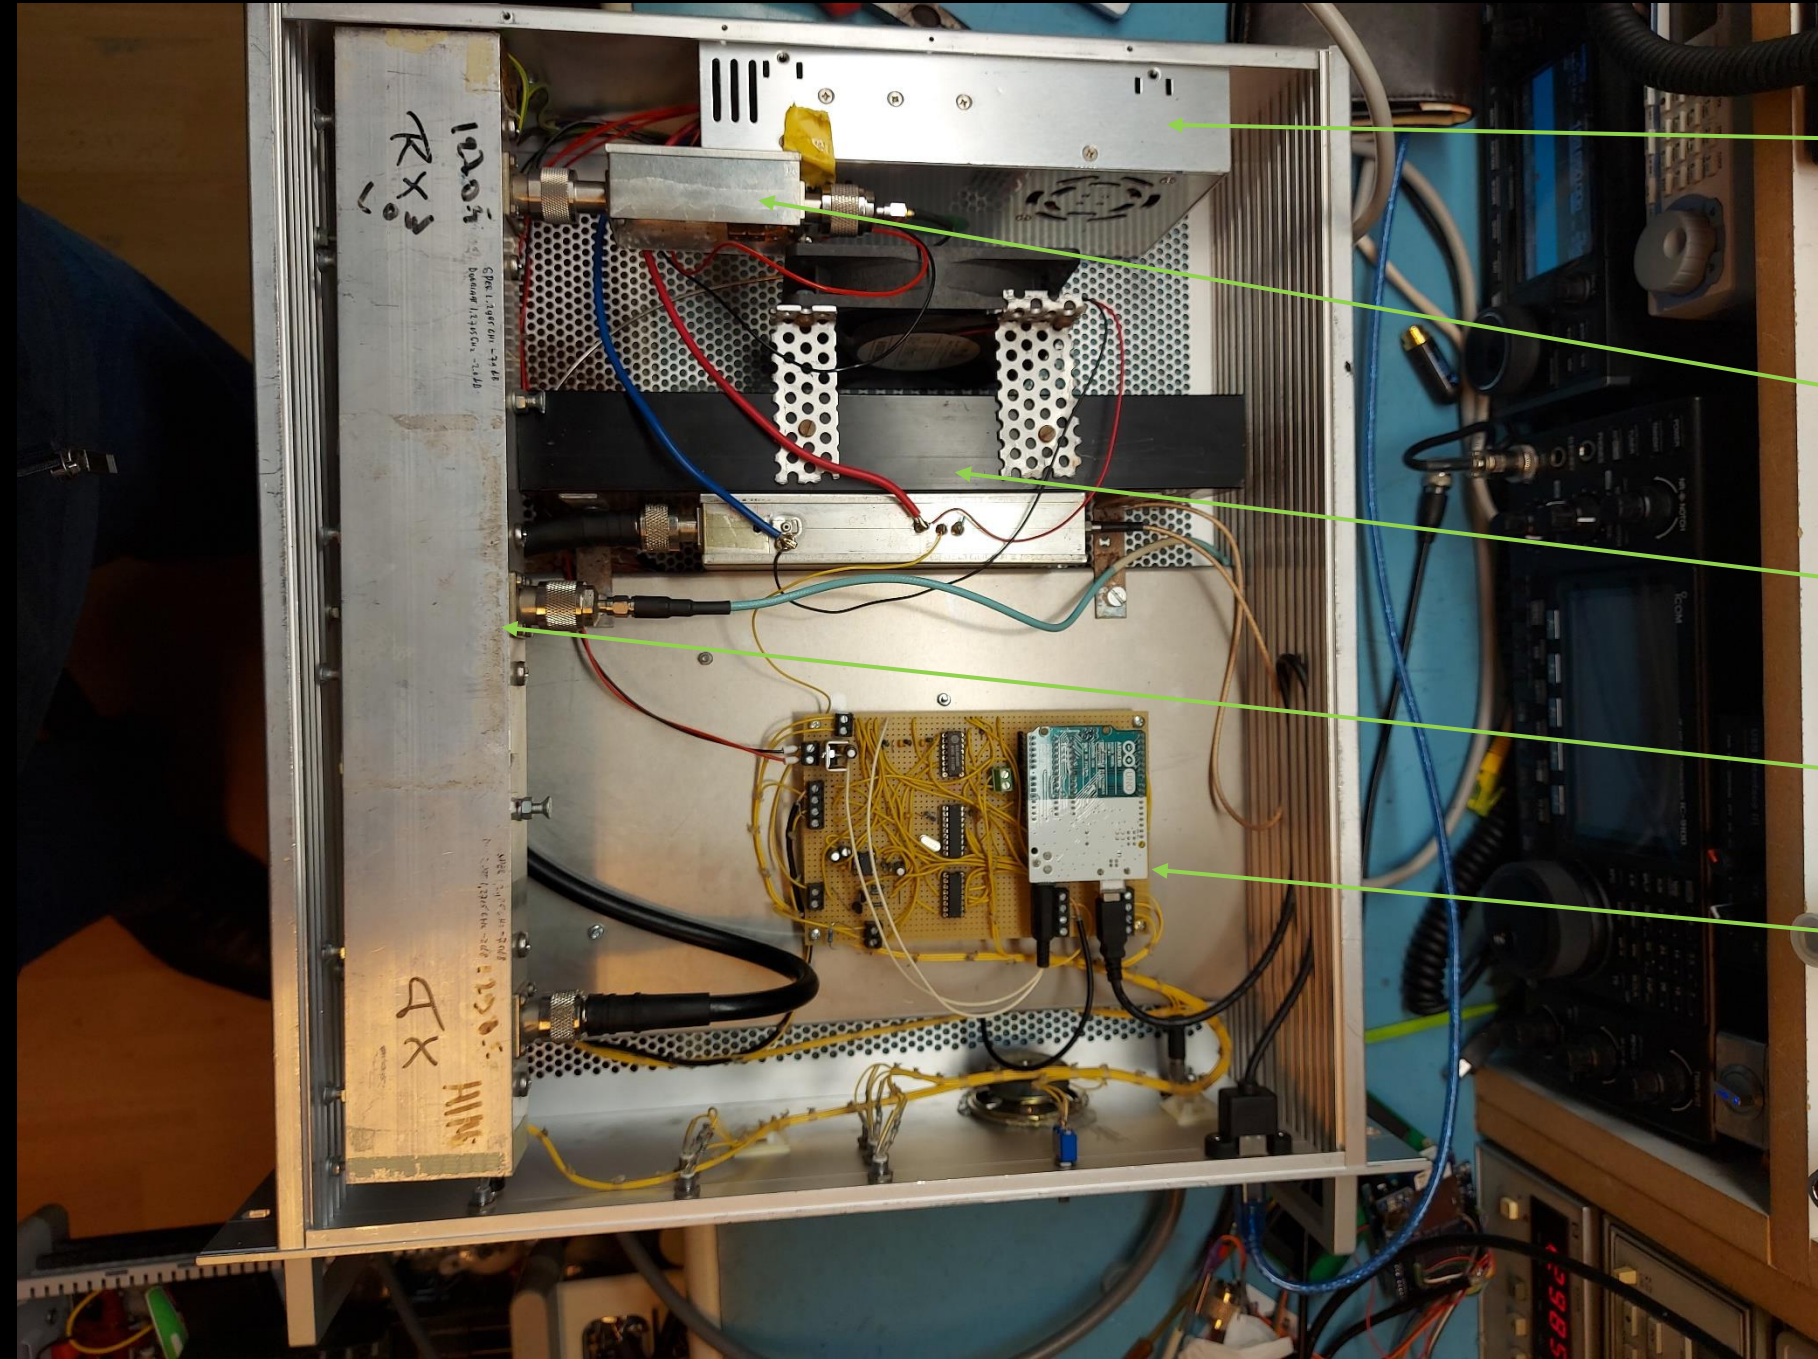


Power Supply

Preamp


Power Amp

Duplex Filter

Controller

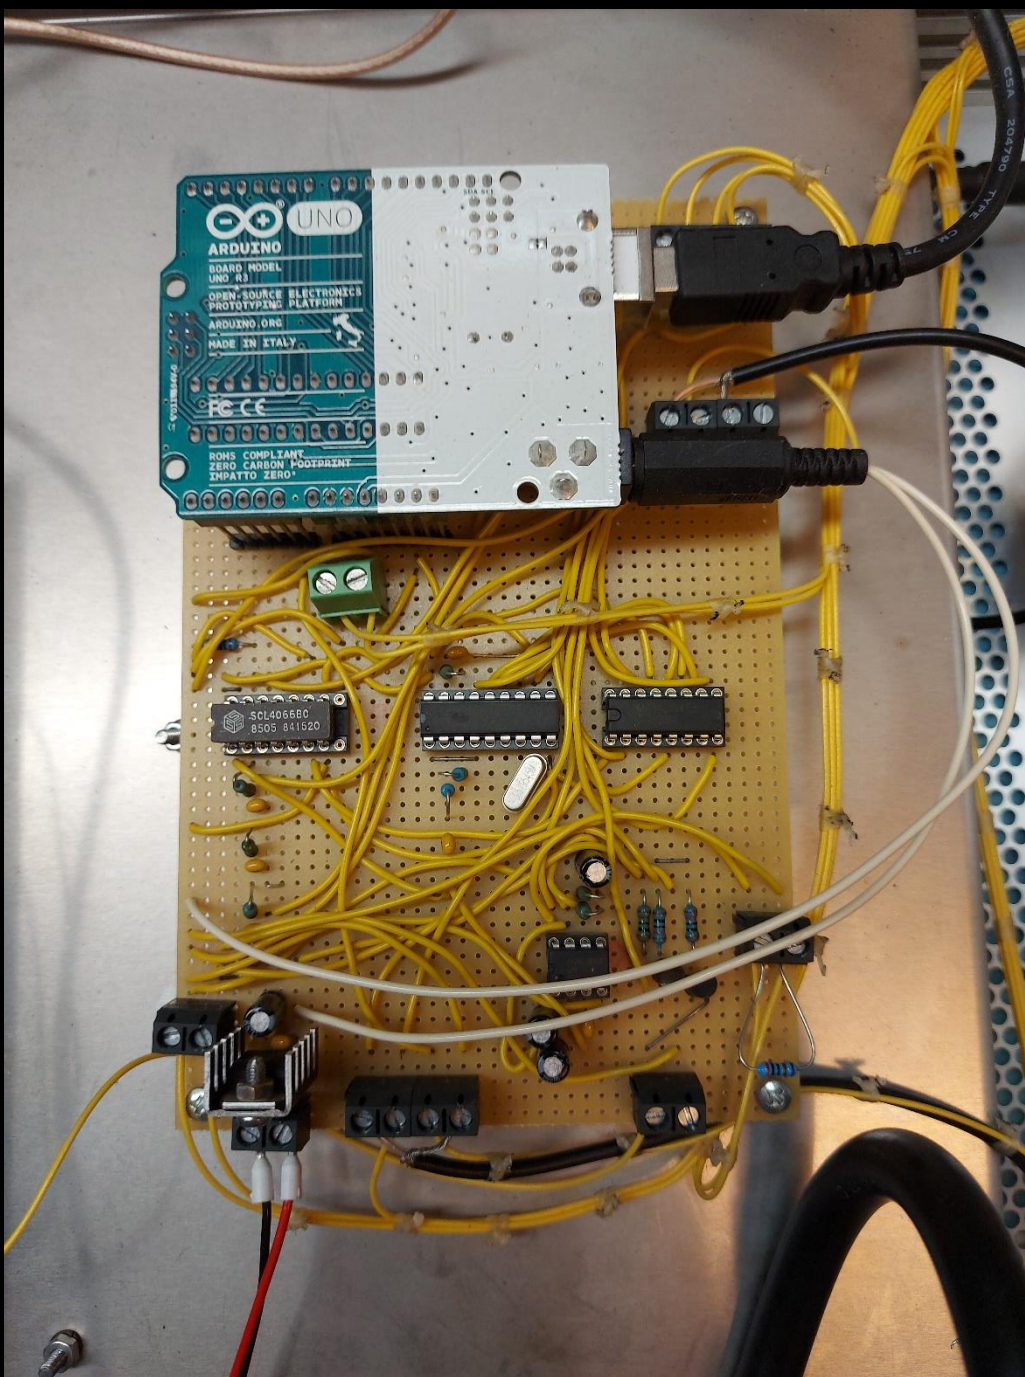

PI6AMF Controller

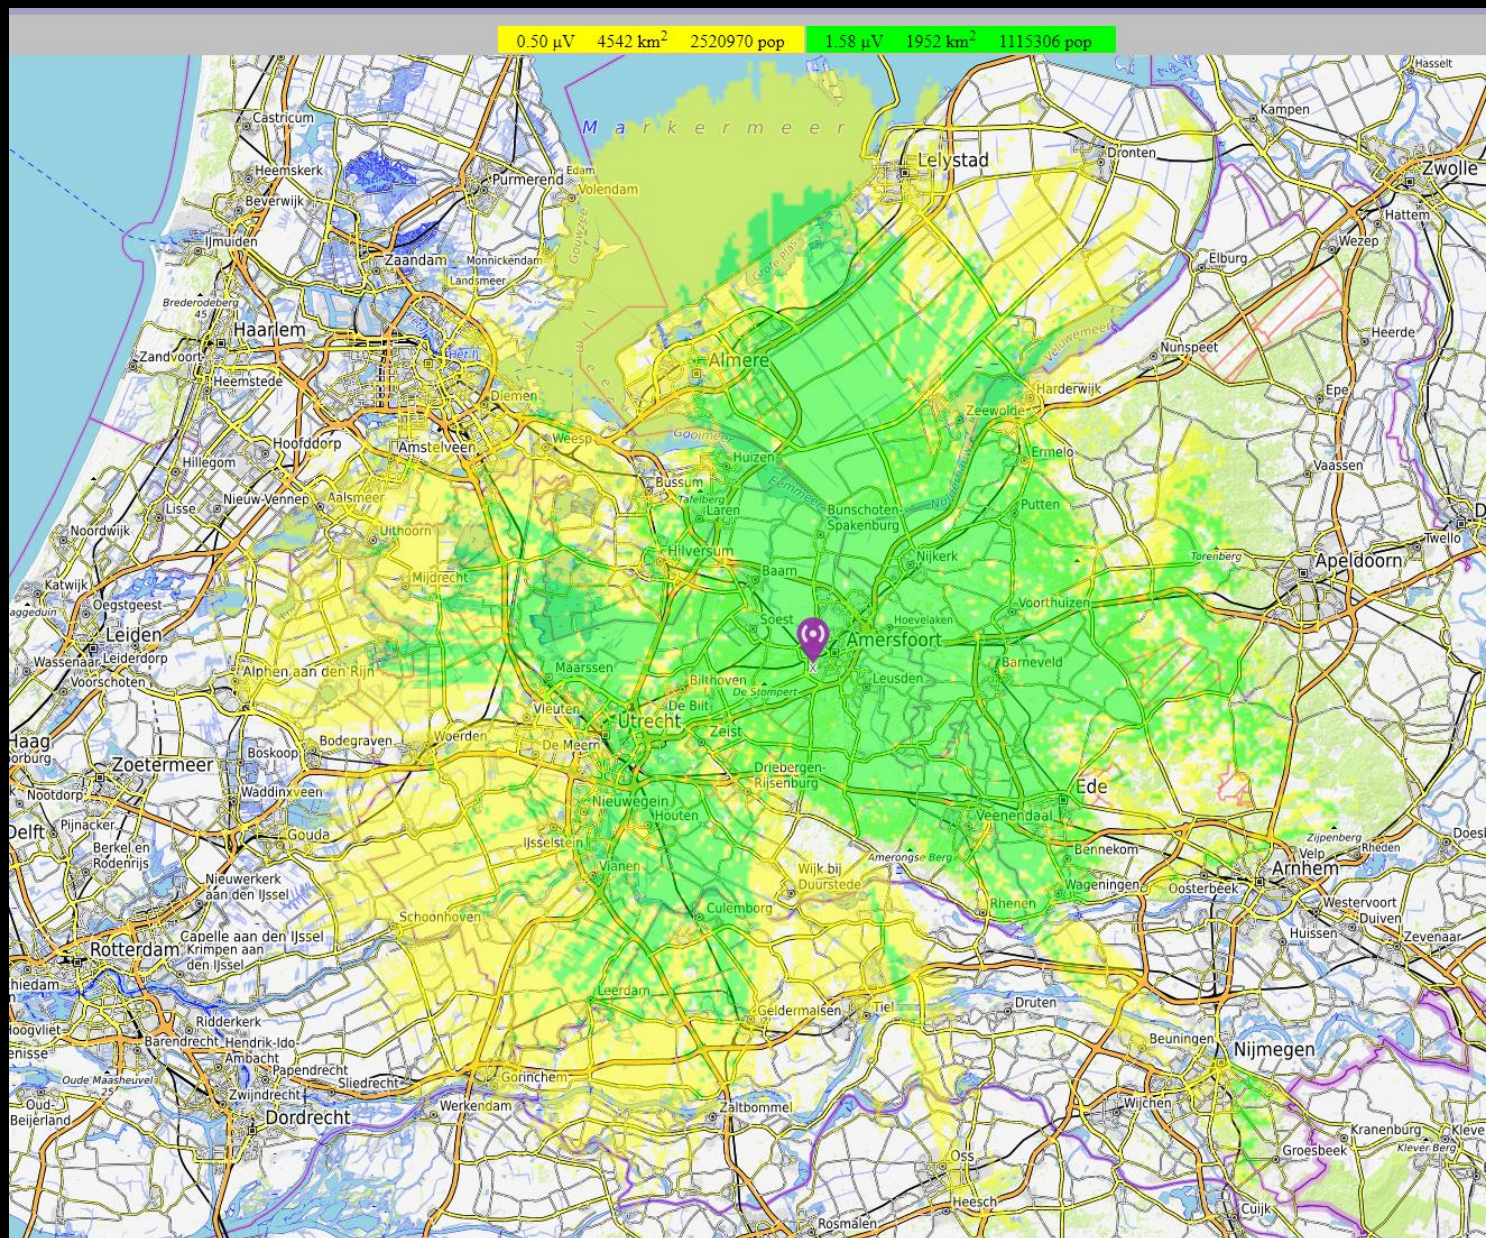

PI6AMF Bereik

Repeater Berghotel




23 CM Relais

70 cm Relais

2 m Relais

Met 77 Hz sub audio andere rogerbeep

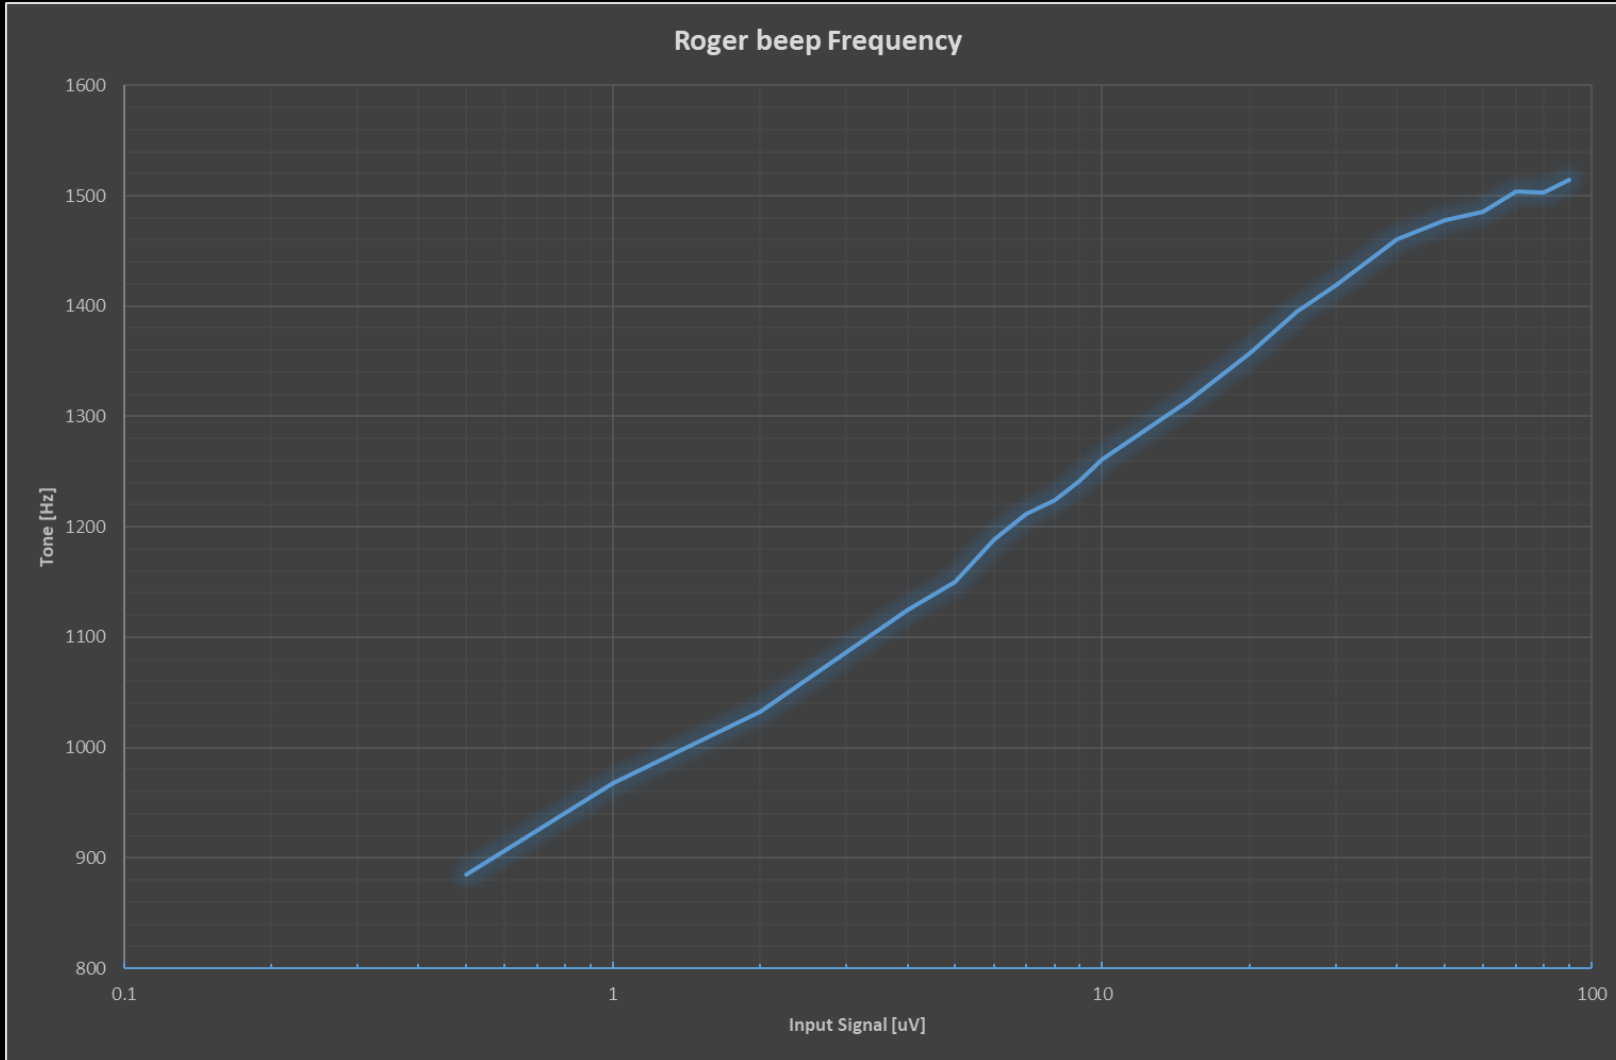

Toonhoogte
rogerbeep geeft
ontvangst sterkte
aan.
Hogere toon is
betere ontvangst.

De PI6AMF heeft op dit moment een frequentie afwijking.

Zender wijkt +1.5 kHz af en ontvanger wijkt +4.0 kHz af.

Deze wordt binnenkort opnieuw afgeregeld.

Bedankt voor uw aandacht